



## LUBRIPLATE® SYNTHETIC, NSF/H1 REGISTERED, HIGH TEMPERATURE LUBRICANTS ARE DESIGNED TO TAKE THE HEAT.

High-temperature applications require specialized lubricants that are both safe and effective. When choosing a lubricant for these applications, look to LUBRIPLATE Synthetic, NSF/H1 Registered High-Temperature Lubricants.


### LUBRIPLATE® SYNXTREME FRH1-46

For hydraulic system applications, **LUBRIPLATE SYNXTREME FRH1-46** is the perfect choice. This is a Factory Mutual Approved, NSF/H1 Registered, fire resistant hydraulic fluid designed for demanding industrial and food processing applications. It is a 100% synthetic, polyolester (POE)-based product and offers:

- An Exceptionally High Flash Point for Superior Fire Protection.
- Outstanding Shear Stability.
- A High Viscosity Index which delivers high temperature application stability.
- Superior Anti-Wear Performance.
- Readily Biodegradable according to OECD 301F.

#### SPECIFICATIONS

Performance Properties	Test Method	Results
Four Ball Wear Test	ASTM D-4172	0.38
V104C Vane Pump Test (mg wear)	ASTM D-7043	<10
Viscosity @ 40°C (cSt)	ASTM D-445	50.37
Viscosity @ 100°C (cSt)	ASTM D-445	9.6
Viscosity @ 0°C (cSt)	ASTM D-445	390
Viscosity Index	ASTM D-2270	176
Fire Resistance Properties		
Flash Point - Cleveland Open Cup	ASTM D-92	593°F / 312°C
Fire Point	ASTM D-92	600°F / 316°C
FM Approvals	Test Standard 6930	ID#0003057229
Packaging Available	5 Gallon Pail	55 Gallon Drum
Part Number	L1024-060	L1024-062

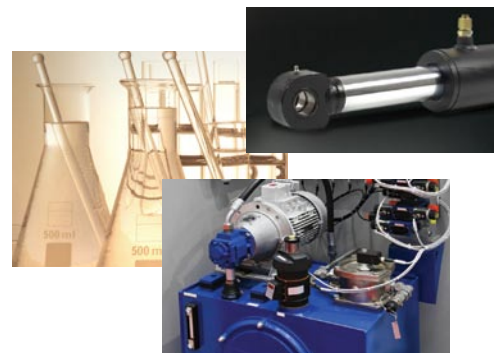

## LUBRIPLATE® SYNXTREME HT MAX GREASE PROVIDES HIGH TEMPERATURE CAPABILITY AND EXTENDED LUBRICATION INTERVALS.

*Advanced  
PFPE Technology  
O-[CF(CF3)-CF2]-O*



### LUBRIPLATE® SYNXTREME HT MAX

If you are looking for a high-temperature grease, **LUBRIPLATE SYNXTREME HT-MAX** has many advantages. This NSF/H1 Registered, perfluoropolyether (PFPE)-based grease:

- Is designed for high-temperature applications up to 550° F / 288° C.
- Is chemically inert which means it is unaffected by strong acids, bases and solvents including fuels.
- Is fortified with an anti-rust and anti-corrosion inhibitor.
- Delivers extremely long service life resulting in extended lubrication intervals.

This product is available in 28 oz cartridges.



## LUBRIPLATE® HTCL-FG-68 & HTCL-FG-220 OVEN CHAIN LUBRICANTS CAN WITHSTAND HIGH TEMPERATURES.



### LUBRIPLATE® HTCL-FG-68 & HTCL-FG-220

**LUBRIPLATE HTCL-FG-68 & HTCL-FG-220** are designed specifically for high-temperature oven chain applications in food manufacturing operations where incidental food contact is a possibility, such as bakery oven chains. These 100% synthetic, polyolester (POE)-based fluids with an ashless additive system will provide:

- Protection against wear, rust, oxidation and corrosion
- Superior film strength resulting in reduced oil consumption and smoke with no resultant VOCs.
- High auto ignition temperatures (>700° F / 371° C), reducing the risk of oven fires.

These products are available in pails, drums and disposable and refillable bins.



**Lubriplate Lubricants Company**

Newark, NJ 07105 / Toledo, OH 43605 / 1-800-733-4755  
www.lubriplate.com / LubeXpert@lubriplate.com