



# **Heavy-Duty Lubricants For The Construction Industry**

**Synthetic and Petroleum-Based  
Heavy-Duty Multi-Purpose Greases**

**Heavy-Duty Hydraulic Oils**

**Heavy-Duty Gear Oils**

**Greases for Open Gearing**

**Environmentally Responsible  
ECO-Friendly Lubricants**

**Specialty Lubricants**

**Spray Lubricants**

**Motor Oils and  
Transmission Fluids**

**Perma Automatic  
Lubricators**




**Lubriplate® Lubricants**

# Lubriplate® Heavy-Duty Lubricants For The Construction Industry

Dear Customer;

Thank you for your interest in Lubriplate Lubricants. For 142 years, our company has manufactured and sold only the highest quality lubricants to all types of industry. This selection of heavy-duty, high-performance lubricants has been formulated to provide outstanding performance even in the most demanding heavy construction environments. At Lubriplate we are committed to developing, manufacturing quality lubricants that meet and exceed your expectations. We back up our products with a wide range of complimentary services which includes; equipment surveys, a toll free technical hotline and e-mail, color coded equipment tags, maintenance software, follow-up lubricant analysis and a wide range of training programs. We appreciate your consideration of Lubriplate Lubricants. We realize that we must constantly work to earn and maintain your trust.

Sincerely,



Richard T. McCluskey  
President and Chief Executive Officer  
e-mail: RichardM@lubriplate.com



All Lubriplate Lubricants are manufactured under strict ISO 9001 registered quality assurance standards.



## Complimentary Value Added Services Offered



### **Toll Free Technical Support Hotline and E-mail**

Call our technical service center toll free at 800-347-5343 or 800-733-4755 for answers to your lubrication questions by phone, or e-mail your questions to [LubeXpert@lubriplate.com](mailto:LubeXpert@lubriplate.com) or contact your nearest Lubriplate district manager or your local distributor representative for complete technical support.



### **Complete Equipment Surveys and Lubricant Inventory Consolidation**

Complete equipment surveys by our professional staff of lubrication engineers are also available to determine your exact lubricant requirements and identify opportunities for lubricant inventory consolidation.



### **Customized, Color Coded, Lubricant Specification Equipment Tags**

Customized to meet your needs, these color coded equipment tags help prevent lubricant misapplication and ensure that the proper lubricant is used when servicing a particular piece of equipment. Based on a complete equipment survey, tags can be provided for each piece of equipment.



### **Lubrication Maintenance Software**

Lubriplate offers a PC based computer software program that puts your entire lubrication and maintenance schedules at your fingertips. This service is based on a complete survey of equipment. Contact Dan Moroses for details at 973-589-9150.



### **No-Charge Oil / Fluid and Grease Analysis**

Our Oil/Fluid and Grease Analysis Program that is offered at no-charge on all Lubriplate products. Tests that are performed include: Viscosity, Acidity, Contamination (% sediment and % moisture,) Spectrochemical (PPM of wear metals and additives) ISO Cleanliness (optional). An interpretation of the results is included along with suggested actions to take.



### **Lubrication Training Programs**

We offer training programs tailored to fit your needs. These educational training sessions focus on all facets of equipment lubrication and are not a sales presentation. Seminars are graphically presented with overheads, and other support material. Available on-site at your facility or in a local conference room. Contact us at 800-733-4755 for more information.

# Heavy-Duty Multi-Purpose Greases

## SYN-3001 & SYN-3002:

100% Synthetic, Polyalphaolefin (PAO)-Based, Moly-Fortified, Heavy-Duty Greases.

These high performance, heavy-duty, moly-fortified, 100% synthetic greases provide superior oxidation resistance for long lasting protection from friction, wear and corrosion. They have excellent high and low temperature performance and are highly resistant to water. Contains 5% Moly. Recommended for all types of heavy equipment.

| LUBRIPLATE PRODUCT | *PRODUCT PART NO. | NLGI GRADE | OIL VIS. cSt / SUS @ 40°C / 100°F | WORKED PENETRATION | ASTM DROP POINT | RECOMMENDED OPERATING TEMPERATURE RANGE | AW/EP | RUST/OXID. ADDITIVES | WATER RESISTANT |
|--------------------|-------------------|------------|-----------------------------------|--------------------|-----------------|---|-------|----------------------|-----------------|
| SYN-3001           | L0315-            | 1          | 218 / 1009                        | 310 / 340          | 500°F / 260°C   | -40°F / -40°C to 400°F / 204°C          | AW/EP | YES                  | YES             |
| SYN-3002           | L0316-            | 2          | 446 / 2066                        | 265 / 295          | 500°F / 260°C   | -30°F / -34°C to 400°F / 204°C          | AW/EP | YES                  | YES             |

\*SYN-3001 & SYN-3002 Greases are available in Cartridges, Pails, 1/4 Drums, Drums & Perma Lubricators. See page 7 for more information and package part number suffix.

## No. 3000 and 3000-W:

Petroleum Based, Tacky, Moly-Lithium Type, Extreme Pressure Greases.

Provides a durable, tenacious, adhesive film to protect against water, rust, and corrosive contaminants. Fortified with molybdenum disulfide for extreme pressure applications. 3000-W is for cold ambient temperatures. Recommended for all types of heavy equipment.

| LUBRIPLATE PRODUCT | *PRODUCT PART NO. | NLGI GRADE | OIL VIS. cSt / SUS @ 40°C / 100°F | WORKED PENETRATION | ASTM DROP POINT | RECOMMENDED OPERATING TEMPERATURE RANGE | AW/EP | RUST/OXID. ADDITIVES | WATER RESISTANT |
|--------------------|-------------------|------------|-----------------------------------|--------------------|-----------------|---|-------|----------------------|-----------------|
| 3000               | L0108-            | 2          | 237 / 1250                        | 265 / 295          | 450°F / 232°C   | 15°F / -9°C to 300°F / 149°C            | AW/EP | YES                  | YES             |
| 3000-W             | L0107-            | 1          | 60 / 315                          | 310 / 340          | 375°F / 191°C   | -30°F / -34°C to 275°F / 135°C          | AW/EP | YES                  | YES             |

\*3000 Series Greases are available in Cartridges, Pails, 1/4 Drums, Drums and Perma Lubricators. See page 7 for more information and package part number suffix.

## LTR-2: "The Red Grease"

Heavy-Duty, Tacky, Red, Lithium Complex Grease.

This rugged, tacky, highly water resistant, extreme pressure grease can withstand higher temperatures than traditional lithium greases. It is recommended for a wide variety of heavy-duty industrial, construction, quarry, aggregate and mining applications. Red in color.

| LUBRIPLATE PRODUCT | *PRODUCT PART NO. | NLGI GRADE | OIL VIS. cSt / SUS @ 40°C / 100°F | WORKED PENETRATION | ASTM DROP POINT | RECOMMENDED OPERATING TEMPERATURE RANGE | AW/EP | RUST/OXID. ADDITIVES | WATER RESISTANT |
|--------------------|-------------------|------------|-----------------------------------|--------------------|-----------------|---|-------|----------------------|-----------------|
| LTR-2              | L0167-            | 2          | 460 / -                           | 265 / 295          | 505°F / 263°C   | 5°F / -15°C to 400°F / 204°C            | AW/EP | YES                  | YES             |

\*LTR-2 is available in Cartridges, Pails, 1/4 Drums and Drums. See page 7 for more information and package part number suffix.

## No. 1444:

Tacky, Aluminum Complex Type Grease.

Specifically formulated for heavy-duty construction and mining equipment. Excellent for slow to moderate speed bearings and chains that are subjected to heat, steam and water.

| LUBRIPLATE PRODUCT | *PRODUCT PART NO. | NLGI GRADE | OIL VIS. cSt / SUS @ 40°C / 100°F | WORKED PENETRATION | ASTM DROP POINT | RECOMMENDED OPERATING TEMPERATURE RANGE | AW/EP | RUST/OXID. ADDITIVES | WATER RESISTANT |
|--------------------|-------------------|------------|-----------------------------------|--------------------|-----------------|---|-------|----------------------|-----------------|
| 1444               | L0227-            | 2          | 626 / 3300                        | 265 / 295          | 500°F / 260°C   | 20°F / -7°C to 400°F / 204°C            | AW/EP | YES                  | YES             |

\*No. 1444 is available in Cartridges, Pails, 1/4 Drums, Drums & Perma Lubricators. See page 7 for more information and package part number suffix.

## 1240 Series:

Lithium-Polymer Type, Viscous, Non-corrosive, Extreme Pressure Greases.

Highly water resistant and tacky, they are designed for applications where the grease is subjected to heavy pressure and shock loads. This series is available in 3 NLGI densities for a wide range of applications and temperatures.

| LUBRIPLATE PRODUCT | *PRODUCT PART NO. | NLGI GRADE | OIL VIS. cSt / SUS @ 40°C / 100°F | WORKED PENETRATION | ASTM DROP POINT | RECOMMENDED OPERATING TEMPERATURE RANGE | AW/EP | RUST/OXID. ADDITIVES | WATER RESISTANT |
|--------------------|-------------------|------------|-----------------------------------|--------------------|-----------------|---|-------|----------------------|-----------------|
| 1240               | L0105-            | 0          | 237 / 1250                        | 355 / 385          | 400°F / 204°C   | 5°F / -15°C to 280°F / 138°C            | AW/EP | YES                  | YES             |
| 1241               | L0104-            | 1          | 237 / 1250                        | 310 / 340          | 400°F / 204°C   | 5°F / -15°C to 290°F / 143°C            | AW/EP | YES                  | YES             |
| 1242               | L0106-            | 2          | 237 / 1250                        | 265 / 295          | 425°F / 218°C   | 15°F / -9°C to 300°F / 149°C            | AW/EP | YES                  | YES             |

\*1240 Series Greases are available in Cartridges, Pails, 1/4 Drums, Drums and Perma Lubricators. See page 7 for more information and package part number suffix.

## MAG-1:

Lithium Polymer Type Grease For a Wide Range of Temperatures.

This multi-purpose grease has a wide operating temperature range for variety of applications. Works well in centralized/automatic lubricating systems.

| LUBRIPLATE PRODUCT | *PRODUCT PART NO. | NLGI GRADE | OIL VIS. cSt / SUS @ 40°C / 100°F | WORKED PENETRATION | ASTM DROP POINT | RECOMMENDED OPERATING TEMPERATURE RANGE | AW/EP | RUST/OXID. ADDITIVES | WATER RESISTANT |
|--------------------|-------------------|------------|-----------------------------------|--------------------|-----------------|---|-------|----------------------|-----------------|
| MAG-1              | L0189-            | 1          | 23 / 120                          | 310 / 340          | 375°F / 191°C   | -60°F / -51°C to 300°F / 149°C          | AW/EP | YES                  | YES             |

\*MAG-1 is available in Cartridges, Pails, 1/4 Drums, Drums & Permas. See page 7 for more information and package part number suffix.

# Heavy-Duty Hydraulic Oils

## Fiske's AW Series:

Heavy-Duty, Anti-Wear Fortified Hydraulic Oils.

These High performance, anti-wear fortified oils are formulated for all types of hydraulic and recirculating systems found on industrial and construction equipment. They are fortified with rust and oxidation inhibitors. The anti-wear additive package helps minimize the formation of sludge and other corrosive by-products. High aniline points help prolong seal life.

Meets Cincinnati Milacron and Vickers specifications.



| FISKE'S AW SERIES | *PRODUCT PART NO. | ISO GRADE | AGMA NO. | SAE GEAR OIL NO. | SAE NO. | VISCOSITY cSt @40°C | VISCOSITY SUS @100°F / 210°F | VISCOSITY INDEX | FLASH POINT   | FIRE POINT    | POUR POINT    |
|-------------------|-------------------|-----------|----------|------------------|---------|---------------------|------------------------------|-----------------|---------------|---------------|---------------|
| AW-32             | F0400-            | 32        | -        | -                | 10      | 29                  | 154 / 44                     | 97              | 405°F / 207°C | 445°F / 230°C | -25°F / -32°C |
| AW-46             | F0401-            | 46        | 1        | 75               | 20      | 42                  | 213 / 48                     | 99              | 410°F / 210°C | 450°F / 232°C | -20°F / -29°C |
| AW-68             | F0402-            | 68        | 2        | 80               | 20      | 61                  | 314 / 54                     | 103             | 430°F / 221°C | 470°F / 243°C | -10°F / -23°C |

\*Fiske's AW Series Oils are available in Pails & Drums. See page 7 for more information and package part number suffix.

## Heavy-Duty Gear Oils

### Fiske's Kling Gear Oils: "The Red Gear Oil"

Heavy-Duty, Tacky, Red, Extreme Pressure (EP) Gear Oils.

These Heavy-duty, tacky, oils cling tenaciously to gear teeth. Formulated for heavy service and fortified with extreme pressure additives, these oils help minimize wear and prolong gear life. For heavy-duty gear applications, rear end differentials and recirculating systems. They provide excellent rust and oxidation protection. They meet MIL-L-2105C specifications and conform to API classification GL-5.

| FISKE'S KLING GEAR | *PRODUCT PART NO. | ISO GRADE | AGMA NO. | SAE GEAR OIL NO. | SAE NO. | VISCOSITY cSt @40°C / 100°C | VISCOSITY SUS @100°F / 210°F | VISCOSITY INDEX | FLASH POINT   | FIRE POINT    | POUR POINT    |
|--------------------|-------------------|-----------|----------|------------------|---------|-----------------------------|------------------------------|-----------------|---------------|---------------|---------------|
| KG 80W-90          | F0162-            | 150       | 5 EP     | 80W-90           | 40      | -                           | 816 / 89                     | 114             | 410°F / 210°C | 460°F / 238°C | -25°F / -32°C |
| KG 85W-140         | F0163-            | 460       | 7 EP     | 85W-140          | 60      | -                           | 1866 / 140                   | 107             | 390°F / 199°C | 435°F / 224°C | -10°F / -23°C |

\*Fiske's Kling Gear Oils are available in Pails, 1/4 Drums & Drums. See page 7 for more information and package part number suffix.

## Open Gear Greases

### Gear Shield Extra Heavy:

Multi-Purpose, Lithium-Based, Open Gear Grease.

Made for all types of open/exposed gears. Gear Shield Extra Heavy is a thick, tacky and adhesive open gear grease for adverse conditions. Excellent fifth wheel lubricant.

| LUBRIPLATE PRODUCT | *PRODUCT PART NO. | NLGI GRADE | OIL VIS. cSt / SUS @ 40°C / 100°F | WORKED PENETRATION | ASTM DROP POINT | RECOMMENDED OPERATING TEMPERATURE RANGE | AW/EP | RUST/OXID. ADDITIVES | WATER RESISTANT |
|--------------------|-------------------|------------|-----------------------------------|--------------------|-----------------|---|-------|----------------------|-----------------|
| Gear Shield X Hwy  | L0152-            | 2.5        | 432 / 2000                        | 234 / 260          | 370°F / 188°C   | 20°F / -7°C to 275°F / 135°C            | AW    | YES                  | YES             |

\*Gear Shield Extra Heavy is available in Caulk Type Cartridges, Spray Cans, Pails, 1/4 Drums, Drums & Perma Lubricators. See page 7 for more information and package part number suffix.

### No. 176:

Inorganic / Organic, Open Gear Grease for Centralized Systems. No Solvents.

This adhesive, semi-fluid grease is for all types of open gears lubricated by centralized systems. Provides good pumpability without the use of harmful solvents.

| LUBRIPLATE PRODUCT | *PRODUCT PART NO. | NLGI GRADE | OIL VIS. cSt / SUS @ 40°C / 100°F | WORKED PENETRATION | ASTM DROP POINT | RECOMMENDED OPERATING TEMPERATURE RANGE | AW/EP | RUST/OXID. ADDITIVES | WATER RESISTANT |
|--------------------|-------------------|------------|-----------------------------------|--------------------|-----------------|---|-------|----------------------|-----------------|
| No. 176            | L0054-            | 00         | 313 / 1650                        | 400 / 430          | NON-MELT        | 25°F / -4°C to 275°F / 135°C            | AW/EP | YES                  | YES             |

No. 176 is available in Pails, 1/4 Drums, Drums & Permas. See page 7 for more information and package part number suffix.

# Environmentally Responsible, ECO-Friendly Green Lubricants



Lubriplate's environmentally responsible lubricants have been developed to help reduce the impact on our environment without sacrificing lubricant performance. Their use can also help our customers comply with the ever increasing environmental regulations for equipment operating in environmentally sensitive areas. The chart below lists some of the industry's standards and terms used for environmentally responsible lubricants.



| Terminology                                | Test Method              | Requirements / Results  |
|--|--------------------------|---|
| Ultimate Biodegradation (Pw1)              | ASTM D-5864              | Minimum 60% converted to CO <sub>2</sub> in 28 days or less                     |
| Readily Biodegradable (Pw1)                | OECD 301B                | Minimum 60% converted to CO <sub>2</sub> in 28 days or less                     |
| Inherently Biodegradable (Pw2) (Pw3) (Pw4) | ASTM D-5864 or OECD 301B | Min. 60% (Pw2), 40% (Pw3), 20-39% (Pw4) converted to CO <sub>2</sub> in 84 days |
| Non/Low Acute Toxicity LC-50               | US EPA LC-50             | Pass  |

## Bio-Based Series Hydraulic Oils:

Ultimately Biodegradable (Pw1), Low Toxicity (LC-50), Vegetable-Based Oils.

For use in hydraulic systems where low toxicity and biodegradability properties are required. A zinc-free additive system delivers exceptional anti-wear, anti-rust, anti-foam and demulsibility properties. They meet ASTM D-5864 (Pw1) U.S. EPA and U.S. Fish and Wildlife requirements (LC50).



| LUBRIPLATE PRODUCT | *PRODUCT PART NO. | ISO GRADE | AGMA NO. | SAE GEAR OIL NO. | SAE NO. | VISCOSITY cSt @40°C / 100°C | VISCOSITY INDEX | FLASH POINT   | FIRE POINT    | POUR POINT    |
|--------------------|-------------------|-----------|----------|------------------|---------|-----------------------------|-----------------|---------------|---------------|---------------|
| BIO-BASED 32       | L1050-            | 32        | -        | -                | 10      | 31 / 7                      | 184             | 457°F / 236°C | 500°F / 260°C | -40°F / -40°C |
| BIO-BASED 46       | L1051-            | 46        | 1        | 75W              | 20      | 44 / 10                     | 199             | 469°F / 243°C | 514°F / 268°C | -40°F / -40°C |
| BIO-BASED 68       | L1052-            | 68        | 2        | 80W              | 20      | 64 / 13                     | 198             | 484°F / 251°C | 525°F / 274°C | -38°F / -39°C |

\*BIO-Based Series Hydraulic Oils are available in Pails and Drums. See page 7 for more information and package part number suffix.

## Marine-Safe Hydraulic Oils: Inherently Biodegradable, Non-Toxic to Aquatic Life (LC-50).

Formulated with premium USP white mineral oils and a zinc free anti-wear additive package, these high-performance hydraulic fluids meet or exceed the performance requirements of most types of hydraulic equipment while providing an additional level of environmental safety. Lubriplate Marine-Safe Hydraulic Oils are non-toxic to aquatic life, exceeding U.S. EPA LC50 and U.S. Fish and Wildlife requirements. These Inherently Biodegradable Oils also pass the U.S. Coast Guard Static Sheen Test Requirements. They meet the service requirements of Vickers, Racine, Denison HF-0, HF-2 and Cincinnati Milacron P-68, P-69 and P-70. They offer excellent oxidation stability and extended fluid change intervals.

| LUBRIPLATE PRODUCT | *PRODUCT PART NO. | ISO GRADE | AGMA NO. | SAE GEAR OIL NO. | SAE NO. | VISCOSITY cSt @40°C / 100°C | VISCOSITY INDEX | FLASH POINT   | FIRE POINT    | POUR POINT    |
|--------------------|-------------------|-----------|----------|------------------|---------|-----------------------------|-----------------|---------------|---------------|---------------|
| Marine-Safe 32     | L0822-            | 32        | -        | -                | 10      | 33 / 6                      | 110             | 395°F / 202°C | 455°F / 235°C | -45°F / -43°C |
| Marine-Safe 46     | L0823-            | 46        | 1        | 75W              | 20      | 44 / 7                      | 108             | 425°F / 218°C | 470°F / 243°C | -35°F / -37°C |
| Marine-Safe 68     | L0824-            | 68        | 2        | 80W              | 20      | 68 / 9                      | 104             | 445°F / 229°C | 520°F / 271°C | -20°F / -29°C |

\*Marine-Safe 32 through 68 is available in 5 Gallon Pails and 55 Gallon Drums. See page 7 for more information and package part number suffix.

## UTF-Bio-Based/Green: Ultimately Biodegradable (Pw1), Vegetable-Based, Universal Tractor Fluid.

An ultimately biodegradable (Pw1), vegetable-based fluid, designed for use in heavy-duty equipment where UTF type fluids are required. Meets the requirements of API GL-4 and most OEMs including: John Deere's Hygard, J20-C, J14A, Quantrol™ J20D, Allison C-3 and C-4, Cat TO-2, Case, Ford, Massey-Ferguson White Farm, Kubota, Steiger and others.

| LUBRIPLATE PRODUCT  | *PRODUCT PART NO. | ISO GRADE | AGMA NO. | SAE GEAR OIL NO. | SAE NO. | VISCOSITY cSt @40°C / 100°C | VISCOSITY INDEX | FLASH POINT   | FIRE POINT | POUR POINT    |
|---------------------|-------------------|-----------|----------|------------------|---------|-----------------------------|-----------------|---------------|------------|---------------|
| UTF-BIO-BASED/GREEN | L1072-            | 46        | 1        | 75W              | 20      | 48 - 10                     | 210             | 484°F / 251°C | -          | -38°F / -39°C |

\*UTF-Bio-Based/Green is available in 5 Gallon Pails and 55 Gallon Drums. See page 7 for more information and package part number suffix.

## Biodegradable Penetrating Oil Multi-Purpose Lubricating Fluid:

ECO-Friendly, Biodegradable, Vegetable-Based, Multi-Purpose Spray Lubricant.

An environmentally friendly, biodegradable, bio-based, lubricating oil for general lubrication of hinges, locks, latches, slides, chains, cables or anywhere metal contacts metal. Ideal for cars, boats, bicycles, garden equipment, guns, tools, office equipment, garage doors, farm equipment and golf courses. Provides a long lasting protective film that prevents friction, wear, rust and corrosion. Excellent moisture displacement properties.

Available in 11 OZ. / 312 g. spray can, Part No. L0721-063. and in 14 OZ. / 414 ml. non-aerosol, hand pump, spray bottle. Part No. L0721-067.



## Specialty Lubricants

### **Power Hammer & Chisel Grease:**

This Heavy-Duty, extreme pressure type, aluminum complex grease with moly, copper and graphite, is made for use on most types of heavy-duty power hammers. Greatly extends shaft and bushing life. Product Part No. L0190-. Available in cartridges and pails. See packaging section on page 7 for package part number suffix.

### **Rock Drill Oils 10R, 30R:**

For all types of rock drills, air hammers and other pneumatic tools. Available in SAE 10W, Part No. L0847-, and 30, Part No. L0848-, with the lighter weight oil for cold weather conditions. Use SPO-255 for SAE 50 rock drill oil. Available in jugs, pails, 1/4 drums and drums. See packaging section on page 7 for more information and package part number suffix.

### **Chain & Cable Fluid / Chain & Cable Heavy:**

Superior penetrating oils that clean and lubricate without gumming. Ideal for wire rope, chains, cables, hinges, springs, slides and other moving metal parts. Protects bright work. Excellent oils to loosen rusty nuts and bolts. Ideal for tapping and drilling. Part Nos. L0135- and L0136-. Available in jugs, pails, 1/4 drums and drums.

### **No. 107 Concrete Form Release Grease:**

This soft grease can easily be sprayed on form contact surfaces providing immediate release once the concrete is set. White in color, it will not stain the casting. Product Part No. L0036-.



## Heavy-Duty Spray Lubricants

### **Chain & Cable Fluid - Penetrating Oil:**

A superior, cleansing, non-gumming penetrating oil for wire rope, chains, cables and general lubrication. Prevents rust and corrosion and protects brightwork. Loosens rusty nuts and bolts. Excellent drilling, tapping, and sawing oil. 11 OZ. / 311.8 g. spray can. Part No. L0135-063.

### **Spray Lube "A" - White Lithium Grease:**

A multi-purpose, white lithium-based lubricant of medium density. Sprays like a fluid, congeals to a grease. Excellent for latches, locks, hinges, battery terminals and other hardware. 11 OZ. / 311.8 g. spray can. Part No. L0034-063.

### **Gear Shield Extra Heavy:**

Developed for easy lubrication of open gears. A tough, tacky grease. Excellent for fifth wheel applications. Packed in handy 11 OZ. / 311.8 g. spray can. Part No. L0152-063.

### **X-357 - Extreme Pressure Lubricant:**

An extreme pressure lubricant that penetrates and adheres. Water resistant and unaffected by temperature extremes. For use on pintle hooks, slide axles, open gears, fifth wheels. Contains moly-disulfide. Packed in 11 OZ. / 311.8 g. spray can. Part No. L0149-063.



## Heavy-Duty Motor Oils / Transmission Fluids

### **Super GPO Heavy-Duty Motor Oils:**

Designed for naturally aspirated and turbo-charged diesel, gasoline and LP gas engines. Ideal for mixed fleets, construction equipment, trucks and automobiles. API service CJ-4, CF-4 (15W-40 & 10W-30), CF, CF-2, CE, CD, SH, SJ, MIL-L-2104G and MIL-L-46152E. SAE 30, Pt. No. L0749-, SAE 40, Pt. No. L0752-, SAE 10W-30, Pt. No. L0754-, SAE 15W-40, Pt. No. L0755-.

### **DEXRON III / MERCON Automatic Transmission Fluid:**

Recommended and approved for all General Motors, Chrysler, and Ford (1989 and Newer) or anywhere Dexron and Ford Mercon Fluids are specified. Product Part No. L0867-.

### **Hydraulic-Transmission Fluid Type UTF:**

For heavy-duty equipment where UTF type fluids are required. Pt. No. L0873-.

# Packaging Containers

The chart below indicates Lubriplate's packaging availability and the corresponding Package Part Number Suffix.

**Part Numbers** - Add the desired Package Part Number Suffix, shown here, to the end of the Product Part Number. Product Part Numbers can be found on the product specification charts found on the previous pages.

**Not all products are available in every package size.**

See package availability for each product at the bottom of the product specification charts.

| PRODUCT / PACKAGE PART NO. SUFFIX | CARTRIDGES**<br>14.5 OZ. / 411 g<br>40 CT. CASE                        | JUG<br>1 GAL / 3.79 L<br>7 LB / 3.18 kg | PAIL<br>35 LB / 15.9 kg<br>5 GAL / 18.9 L | QTR. DRUM<br>120 LB / 54 kg<br>16 GAL / 60.5 L | FULL DRUMS<br>400 LB / 181 kg<br>55 GAL / 208 L |
|-----------------------------------|--|---|---|--|---|
| Grease Products*                  | -098   | -                                       | -035                                      | -039   | -040  |
| Gear Oils*                        | -  | -007                                    | -035                                      | -039   | -040  |
| Hydraulic Oils / Fluids           | -  | -057                                    | -060                                      | -061   | -062  |
| Specialty Oils/Fluids             | -  | -057                                    | -060                                      | -061   | -062  |
| Spray Lubricants                  | See product description for packaging information on spray lubricants. |   |   |  |   |



\*Items Sold By Weight. Other items sold by volume.

\*\*GEAR SHIELD EXTRA HEAVY is available in 10 1/2 OZ. / 297g caulk type cartridges, Part No. L0152-000.

## Perma Automatic Lubricators Pre-Filled with Lubriplate Lubricants

Perma automatic lubricators provide clean, safe, reliable and consistent equipment lubrication around the clock. They are fully programmable and deliver the right amount of lubricant consistently, day after day, week after week. A wide range of types and sizes are available to meet your exact needs. All come pre-filled, ready to install.

**Only select products are available in Perma Lubricators.**  
**Check the bottom of chart for product availability.**

**Part Numbers** - Add the desired Perma Package Part Number Suffix listed on the chart to the end of the desired Lubriplate Product Part Number.




| PERMA MODEL        | VOLUME SIZE | OUTPUT RATE                  | PRESSURE BUILD-UP | FEATURES / DETAILS                                      | PERMA PACKAGE PART NO. SUFFIX |
|--------------------|-------------|------------------------------|-------------------|---|-------------------------------|
| CLASSIC            | 120 cc      | 1 Month                      | 65 PSI            | Metal Housing   | -101                          |
| CLASSIC            | 120 cc      | 3 Month                      | 65 PSI            | Metal Housing   | -103                          |
| CLASSIC            | 120 cc      | 6 Month                      | 65 PSI            | Metal Housing   | -106                          |
| CLASSIC            | 120 cc      | 12 Month                     | 65 PSI            | Metal Housing   | -112                          |
| FROST              | 120 cc      | 1 Month                      | 65 PSI            | Metal Housing, For Cold Temperature Applications        | -301                          |
| FROST              | 120 cc      | 3 Month                      | 65 PSI            | Metal Housing, For Cold Temperature Applications        | -303                          |
| FUTURA             | 120 cc      | 1 Month                      | 65 PSI            | Transparent Plastic Housing                             | -201                          |
| FUTURA             | 120 cc      | 3 Month                      | 65 PSI            | Transparent Plastic Housing                             | -203                          |
| FUTURA             | 120 cc      | 6 Month                      | 65 PSI            | Transparent Plastic Housing                             | -206                          |
| FUTURA             | 120 cc      | 12 Month                     | 65 PSI            | Transparent Plastic Housing                             | -212                          |
| NOVA               | 130 cc      | Programmable Electronic Unit | 90 PSI            | LCD Display, Integrated Temperature Compensation        | -130                          |
| NOVA LC REFILL KIT | 130 cc      | -                            | -                 | Refill Kit - Includes Pre-Filled NOVA LC Unit           | -131                          |
| STAR VARIO         | 60 cc       | 1, 3, 6, 12 Mo. Programmable | 75 PSI            | Battery Operated  | -460                          |
| STAR VARIO         | 120 cc      | 1, 3, 6, 12 Mo. Programmable | 75 PSI            | Battery Operated  | -412                          |
| STAR VARIO         | 250 cc      | 1, 3, 6, 12 Mo. Programmable | 75 PSI            | Battery Operated  | -425                          |
| STAR CONTROL       | 60 cc       | Based on 100 Machine Hours   | 75 PSI            | PLC Controlled / 12-30 Volts DC                         | -560                          |
| STAR CONTROL       | 120 cc      | Based on 100 Machine Hours   | 75 PSI            | PLC Controlled / 12-30 Volts DC                         | -512                          |
| STAR CONTROL       | 250 cc      | Based on 100 Machine Hours   | 75 PSI            | PLC Controlled / 12-30 Volts DC                         | -525                          |
| STAR LC REFILL KIT | 60 cc       | -                            | -                 | Refill Kit - Includes Pre-Filled LC Unit - Battery Pack | -660                          |
| STAR LC REFILL KIT | 120 cc      | -                            | -                 | Refill Kit - Includes Pre-Filled LC Unit - Battery Pack | -612                          |
| STAR LC REFILL KIT | 250 cc      | -                            | -                 | Refill Kit - Includes Pre-Filled LC Unit - Battery Pack | -625                          |
| PRO                | 250 cc      | 1 Day to 24 Mo. Programmable | 360 PSI           | Battery Operated  | -725                          |
| PRO                | 500 cc      | 1 Day to 24 Mo. Programmable | 360 PSI           | Battery Operated  | -750                          |
| PRO MP-6           | 250 cc      | 1 Day to 24 Mo. Programmable | 360 PSI           | Battery Operated, 1-6 Lubrication Points                | -726                          |
| PRO MP-6           | 500 cc      | 1 Day to 24 Mo. Programmable | 360 PSI           | Battery Operated, 1-6 Lubrication Points                | -756                          |
| PRO C              | 250 cc      | Based on 100 Machine Hours   | 360 PSI           | PLC Controlled / 12-30 Volts DC                         | -825                          |
| PRO C              | 500 cc      | Based on 100 Machine Hours   | 360 PSI           | PLC Controlled / 12-30 Volts DC                         | -850                          |
| PRO C MP-6         | 250 cc      | Based on 100 Machine Hours   | 360 PSI           | PLC Controlled / 12-30 Volts DC, 1-6 Lubrication Points | -826                          |
| PRO C MP-6         | 500 cc      | Based on 100 Machine Hours   | 360 PSI           | PLC Controlled / 12-30 Volts DC, 1-6 Lubrication Points | -856                          |
| PRO LV REFILL KIT  | 250 cc      | -                            | -                 | Refill Kit - Includes Pre-Filled LV Unit - Battery Pack | -925                          |
| PRO LV REFILL KIT  | 500 cc      | -                            | -                 | Refill Kit - Includes Pre-Filled LV Unit - Battery Pack | -950                          |

### LUBRIPLATE HEAVY-DUTY LUBRICANTS AVAILABLE IN PERMA LUBRICATORS

GREASES - No. 176 Pt. No. L0054-, 1240 Pt. No. L0105-, 1241 Pt. No. L0104-, 1242 Pt. No. L0106-, 1444 Pt. No. L0227-, SYN-3001 Pt. No. L0315-, 3000 Pt. No. L0108- MAG-1 Pt. No. L0189-, OILS - CHAIN & CABLE FLUID Pt. No. L0135-, CHAIN & CABLE HEAVY Pt. No. L0136-,

# District Managers and Specialists

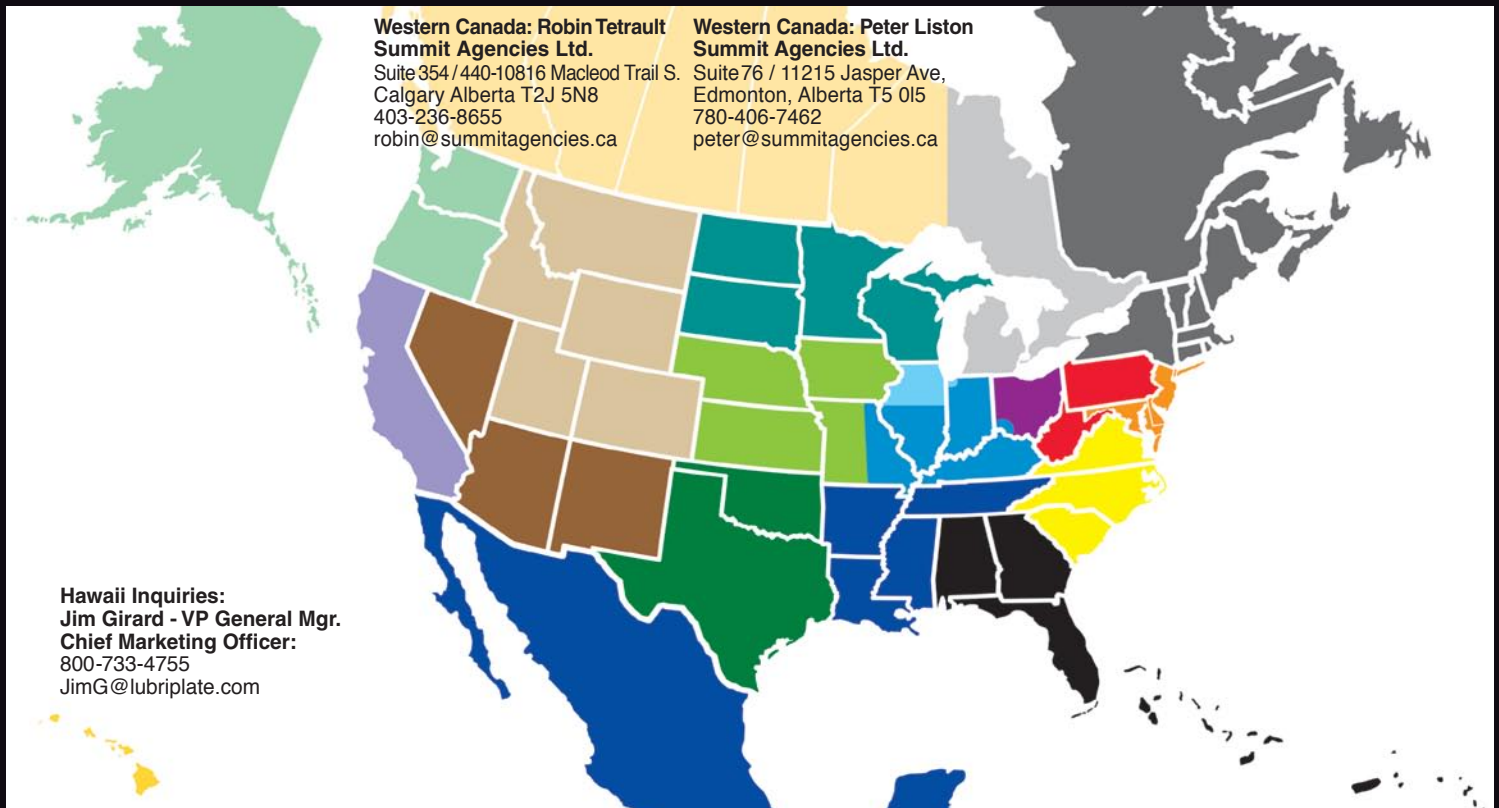

**Western Canada: Robin Tetrault**  
**Summit Agencies Ltd.**  
 Suite 354 / 440-10816 Macleod Trail S.  
 Calgary Alberta T2J 5N8  
 403-236-8655  
 robin@summitagencies.ca

**Western Canada: Peter Liston**  
**Summit Agencies Ltd.**  
 Suite 76 / 11215 Jasper Ave,  
 Edmonton, Alberta T5 015  
 780-406-7462  
 peter@summitagencies.ca

**Hawaii Inquiries:**  
**Jim Girard - VP General Mgr.**  
**Chief Marketing Officer:**  
 800-733-4755  
 JimG@lubriplate.com

## Western Region:

### District Managers:

- Steve Paule**  
602-690-0458  
SteveP@lubriplate.com
- Alexander Taylor**  
5709 Camelot Drive SW  
Olympia, WA 98512  
360-808-0953  
360-357-6216 (Fax)  
ataylor@lubriplate.com
- Dan O'Brien**  
1359 East Skyview Drive  
Salt Lake City, UT 84124  
801-550-0383  
dobrien@lubriplate.com
- Francis Gondouin**  
216 El Prado  
San Rafael, CA 94903  
415-279-0609  
fgondouin@lubriplate.com
- Roger Thostenson**  
1329 Auburn Place  
Plano, TX 75093  
972-998-0344 / 972-403-3801 (Fax)  
rthostenson@lubriplate.com

## Central Region:

### District Managers:

- Bill Outhouse**  
5142 County Highway A  
Oregon, WI 53575-2708  
608-835-5689  
608-835-6423 (Fax)  
bouthouse@lubriplate.com
- Dennis E. King**  
20902 West 118th Terrace  
Olathe, KS 66061  
913-839-8444 (Office & Fax)  
913-424-7404 (Cell)  
dking@lubriplate.com
- Don Wrocklage**  
2330 Winegarden Court  
Ballwin, MO 63011  
636-458-0094  
636-458-7549 (Fax)  
dwrocklage@lubriplate.com
- Nick Guerrero**  
973-934-1929  
nguerrero@lubriplate.com  
States Covered: TN.; AR.;  
LA.; MS and Mexico.
- Chris Franzoni**  
21653 Kendyl Court  
Macomb, MI 48044  
586-530-6922 (Cell)  
cfranzoni@lubriplate.com
- Scott Besedick**  
1219 Elliston Court  
Crown Point, IN 46307  
219-661-8712  
219 661-9069 (Fax)  
sbesedick@lubriplate.com
- Kim Henricks**  
414 Winter St.  
Elmore, OH 43416  
419-862-7603  
419-862-7903 (Fax)  
khenricks@lubriplate.com

## Eastern Region:

### District Managers:

- Michael Barto**  
44 North Cope Hill Drive  
Lititz, PA 17543  
717-665-0424  
717-665-0425 (Fax)  
mbarto@lubriplate.com
- David Reh**  
142 Andrew Street  
Hamilton, NJ 08610  
973-722-6098  
dreh@lubriplate.com
- Robert A. Reh Jr.**  
5312 Meadow Chase Rd.  
Midlothian, VA 23112  
864-270-8558 (Cell)  
rrehjr@lubriplate.com
- Lee Myers**  
PMB 290 / 3948 S. Third St.  
Jacksonville Bch., FL 32250  
904-221-0557 / 904-221-1025 (Fax)  
lmyers@lubriplate.com
- Jim Zappulla**  
176 Tobacco Street  
Lebanon, CT 06249  
860-450-0222  
jzappulla@lubriplate.com

## Specialists:

- |  |  |   |  |   |
|--|--|---|--|---|
| <p><b>Vice President &amp; Gen Mgr.</b><br/> <b>International Inquiries:</b><br/> <b>Chief Marketing Officer:</b><br/> <b>Jim Girard</b> - 800-733-4755<br/>         JimG@lubriplate.com</p> <p><b>Sales &amp; Technical Assistant to Chief Marketing Officer:</b><br/> <b>Vera Tehayel</b> - 973-589-9150<br/>         VeraT@lubriplate.com</p> | <p><b>Assistant Vice President Domestic Sales &amp; Service Inquiries:</b><br/> <b>Tim Cusack</b> - 800-733-4755<br/>         TimC@lubriplate.com</p> <p><b>Toledo Sales Director:</b><br/> <b>Mike Kontak</b> -<br/>         419-691-2491<br/>         MikeK@lubriplate.com</p> | <p><b>Vice President, Sales:</b><br/> <b>Steve Morrow</b> -<br/>         Office: 973-589-9150<br/>         Cell: 973-722-6516<br/>         SMorrow@lubriplate.com</p> <p><b>Quality Manager:</b><br/> <b>Jacki Dusza</b> -<br/>         419-691-2491<br/>         JackiD@lubriplate.com</p> | <p><b>Corporate Director of Technology:</b><br/> <b>Sib Hamid</b> -<br/>         419-691-2491<br/>         SHamid@lubriplate.com</p> <p><b>Director of Information Technology:</b><br/> <b>Dan Moroses</b> - 973-465-5737<br/>         DanM@lubriplate.com</p> | <p><b>OEM Marketing Analyst and Government Agency Liaison:</b><br/> <b>Ellen Girard</b> -<br/>         973-465-5731<br/>         EGirard@lubriplate.com</p> <p><b>National Accounts Rep:</b><br/> <b>Steve Paule</b> -<br/>         602-690-0458<br/>         SteveP@lubriplate.com</p> |
|--|--|---|--|---|

## Lubriplate Lubricants Company

129 LOCKWOOD STREET / NEWARK, NJ 07105 / PHONE 800-733-4755 / FAX 800-347-5329  
 TOLEDO, OH OFFICE / PHONE 419-691-2491 / FAX 800-347-5348