



SYNTHETIC COUPLING GREASE

Provides exceptional performance in high-speed
grid & gear type flexible shaft couplings
operating under normal to severe conditions



ADVANTAGES

- Full Synthetic
- Highly Adhesive
- Excellent Resistance to Centrifugal Fluid Separation
- Provides Long-Term Lubrication
- Superior Extreme Pressure Properties
- Provides Additional Protection during High Shock Loads and/or Shaft Misalignment
- Excellent Heat Resistance and Oxidative Stability
- Provides High Corrosion Protection in Wet Environments

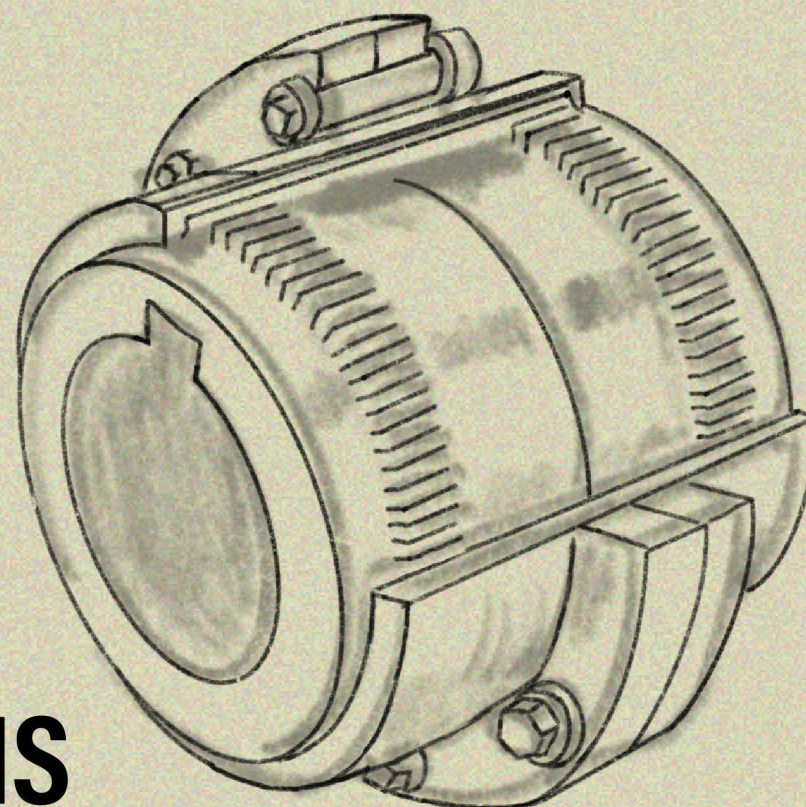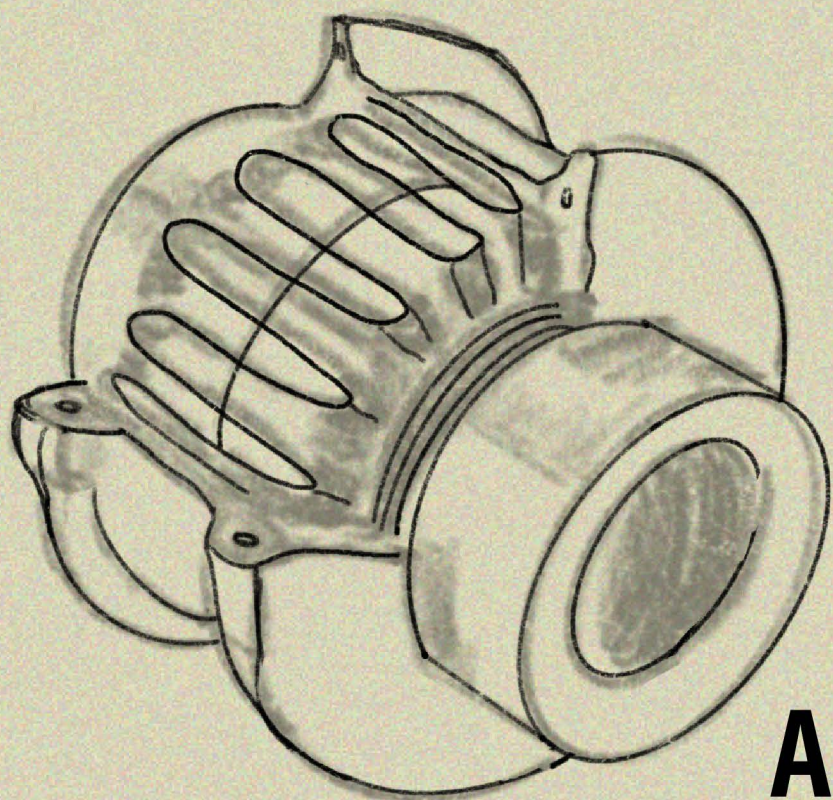

APPLICATIONS

- Grid Couplings
- Gear Couplings
- Severe Duty High Speed Flexible Shaft Couplings

PACKAGING AVAILABLE

14 oz. Cartridge	L0410-002
Case of 10,14 oz. Cartridge	L0410-010
35 lb. pail	L0410-035

Lubriplate Lubricants

Sales, Service & Distribution Center

Newark, NJ 07105

Phone: 973-589-9150 Fax: 973-589-4432

Manufacturing, Sales, Service & Distribution Center

Toledo, OH 43605

Phone: 419-691-2491 Fax: 419-693-3806

Sales and Tech Service Support

Phone: 1-800-733-4755

